



Input Voltage	Light Source	Color Rendering Index	Color Temperature	Beam Angle	Application Temperature	Material	Cover Type
220-240V~ (50/60Hz)	SMD5730	>80	3000 6500K	180°	-20~45°C	PC Aluminum	PMMA acrylic

Model	KL-RCL/22300
Power	18W
Lumen	2100-2240lm
Dimension	Φ500mm*H105mm
Installing Calibre	Φ300mm
Function1	Normal
Function2	TRIAC Dimmer
Function3	Remote Dimmer

Light Distribution Curve 6000K

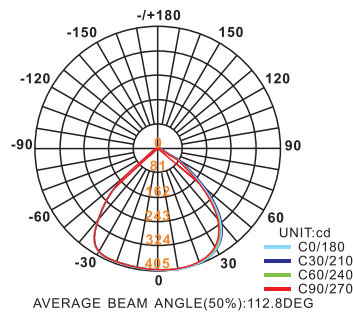


Average E(LX) Figure 6000K

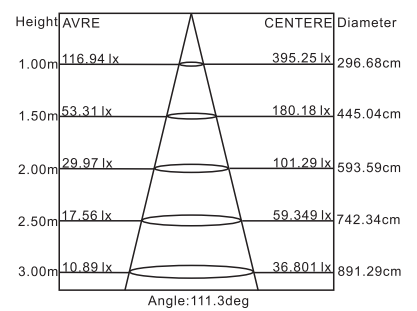


Model	KL-RCL/22350
Power	24W
Lumen	1800-1920lm
Dimension	Φ530mm*H110mm
Installing Calibre	Φ350mm
Function1	Normal
Function2	TRIAC Dimmer
Function3	Remote Dimmer

Light Distribution Curve 6000K

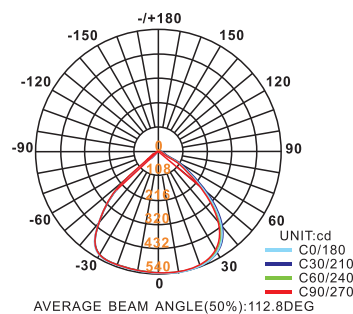


Average E(LX) Figure 6000K

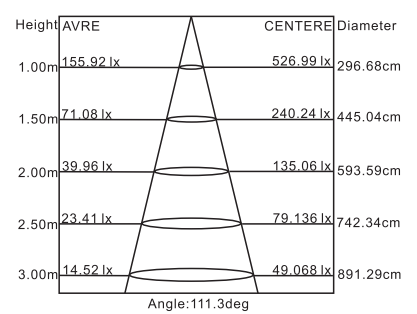


Model	KL-RCL/22400
Power	30W
Lumen	2250-2400lm
Dimension	Φ560mm*H115mm
Installing Calibre	Φ400mm
Function1	Normal
Function2	TRIAC Dimmer
Function3	Remote Dimmer


Light Distribution Curve 6000K

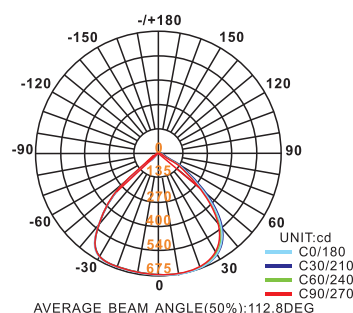

Average E(LX) Figure 6000K

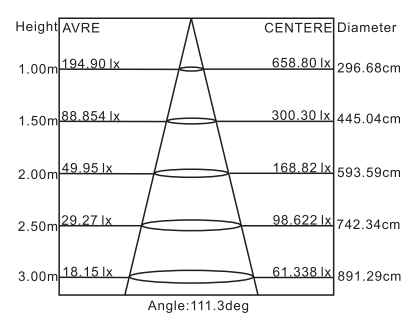

Installation and Operation Instruction:

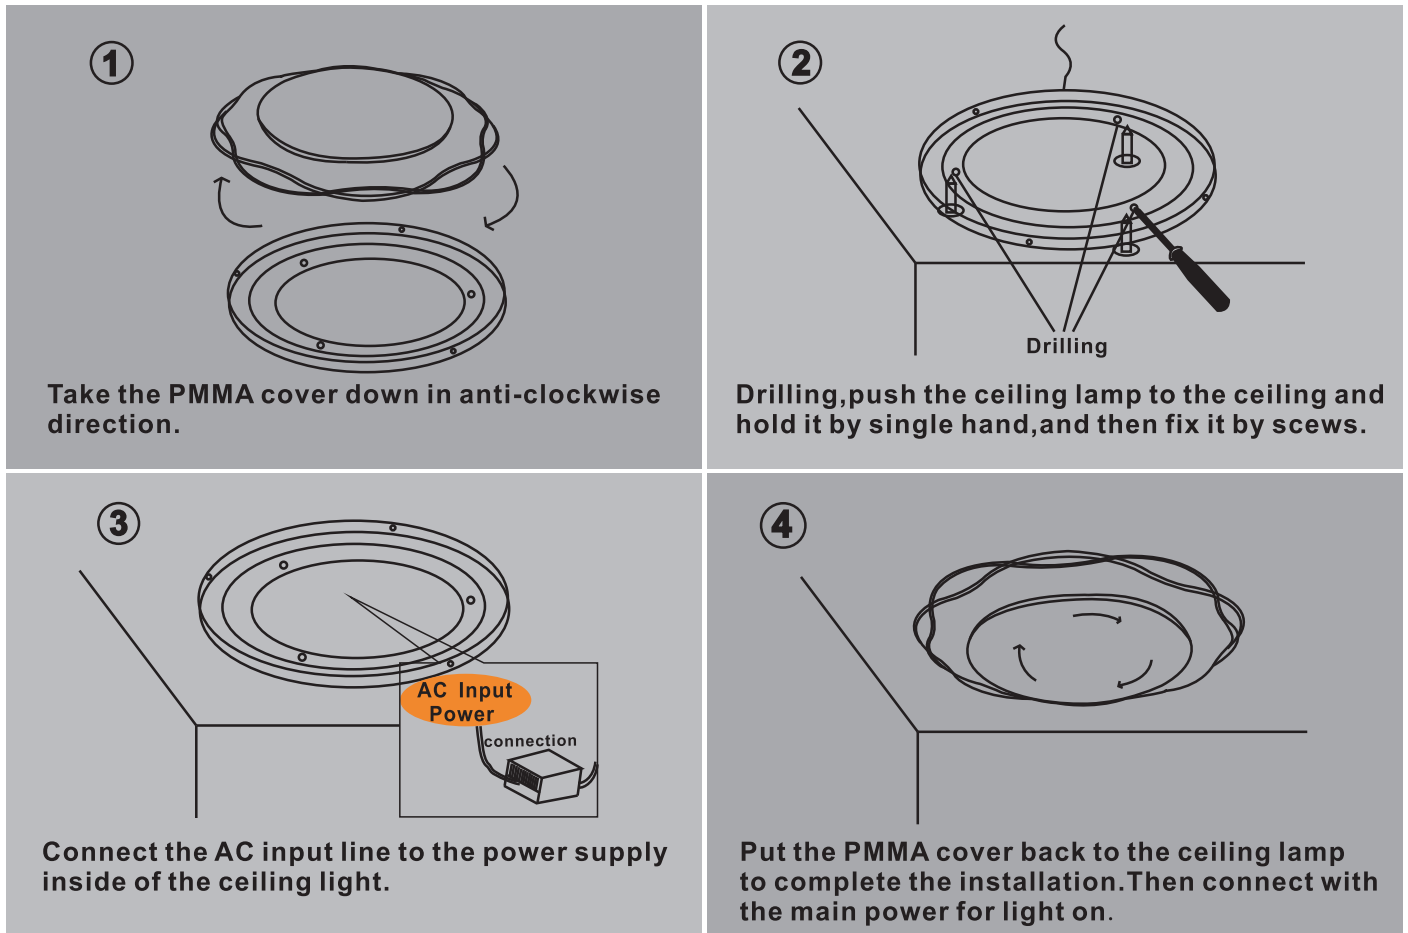

The Wiring Diagram:

