




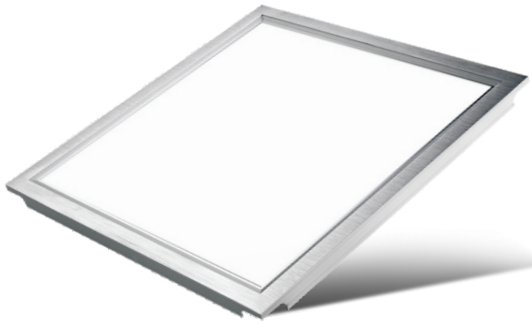


Model	KL-6060-36W/P
Input Voltage	220-240V~(50/60Hz)
Power	36W
Light Source	SMD2835/SMD4014
Color Rendering Index	>80
Color Temperature	3000-6500K
Lumen	2520-2700lm
Beam Angle	180°
Application Temperature	-20~45°C
Dimmension	L600*W600*H15mm
Cut Hole Size	L1590*W1590mm
Material	PC+Aluminum

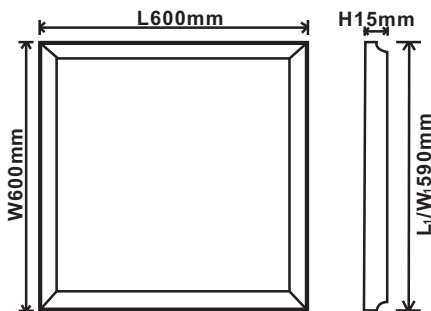


Light Distribution Curve 6000K

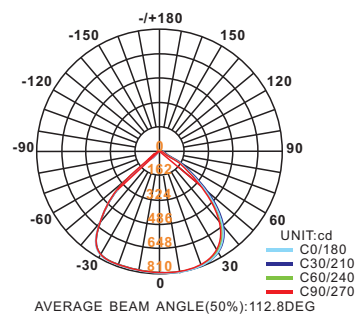


Average E(LX) Figure 6000K

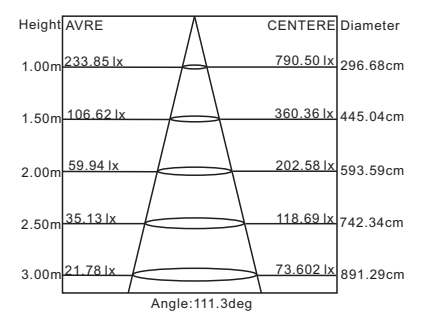



Model	KL-6060-48W/P
Input Voltage	220-240V~(50/60Hz)
Power	48W
Light Source	SMD2835/SMD4014
Color Rendering Index	>80
Color Temperature	3000-6500K
Lumen	3360-3600lm
Beam Angle	180°
Application Temperature	-20~45°C
Dimmension	L600*W600*H15mm
Cut Hole Size	L1590*W1590mm
Material	PC+Aluminum

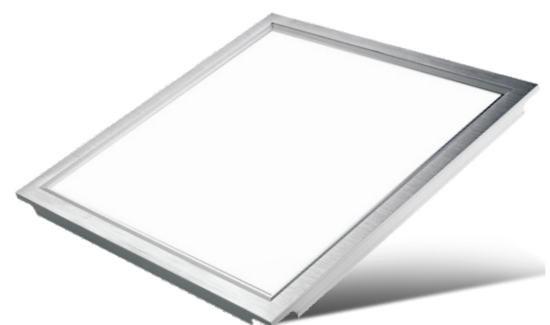

Light Distribution Curve 6000K

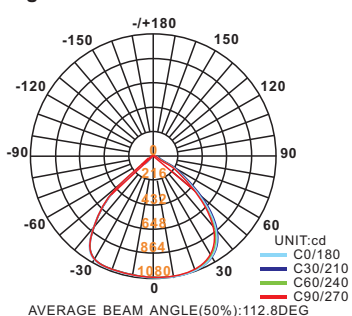


Average E(LX) Figure 6000K

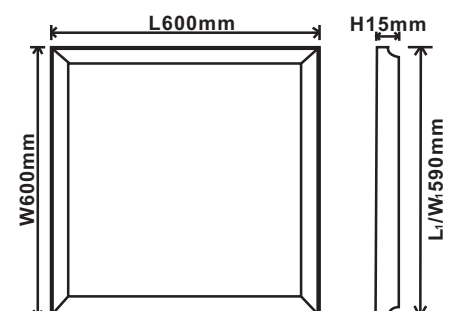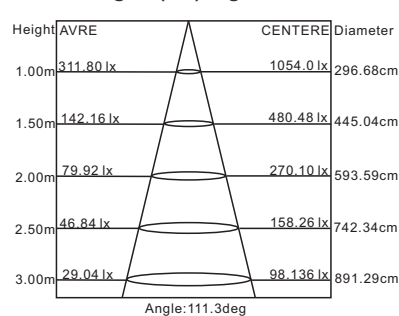


Installation and Operation Instruction:


Embedded Type

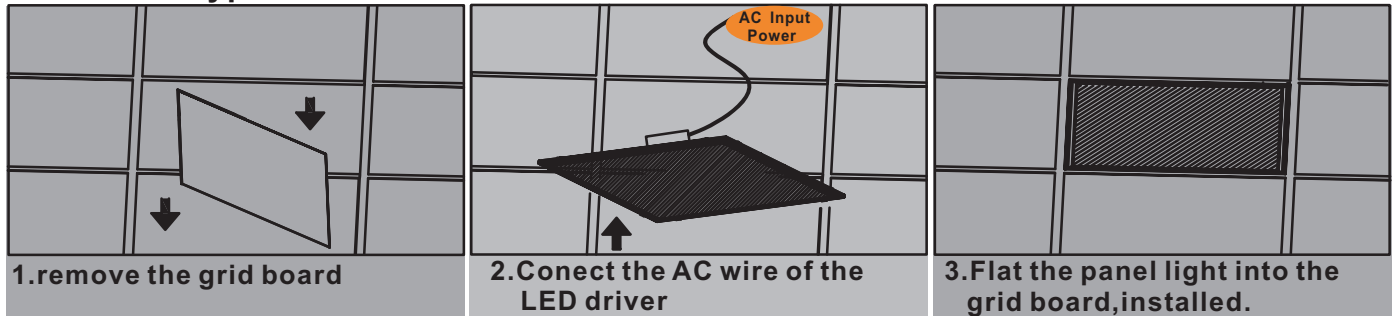

Hang Type

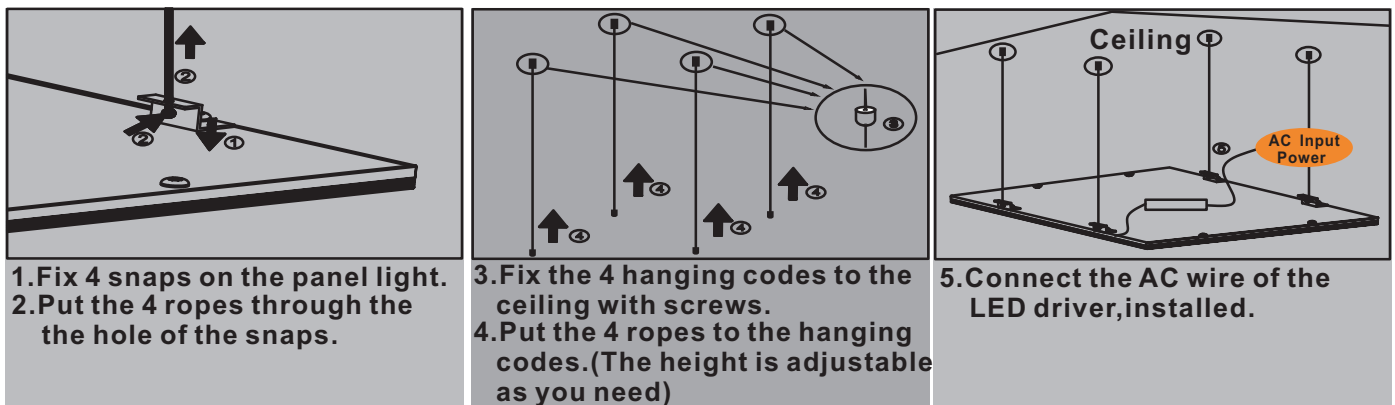

Mounted on the ceiling

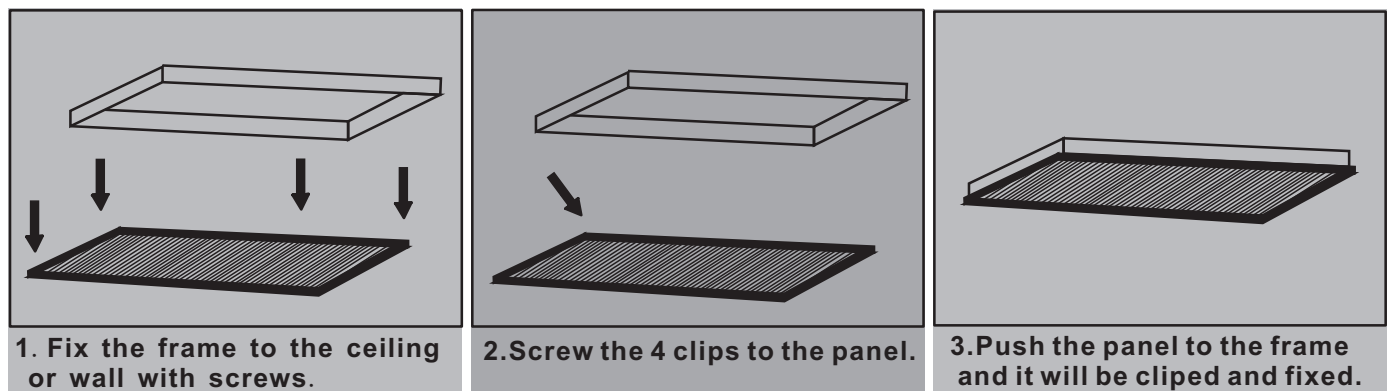

The Wiring Diagram:

