


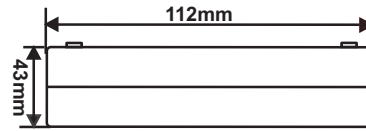







Power Supply Adaptor Series

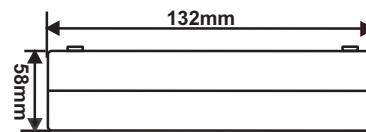

Input	Power Factor(λ)	Ta (°C)	Tc (°C)	Dimmension (L*W*H)	Application Temperature	Waterproof Index	Approval
220-240V~, 50/60Hz, 220mA	>0.6	45	75	L112*W43*H30mm	-20~45°C	IP20	CE LVD CE EMC SEMKO
Model	Load	Output Voltage		Model	Load	Output Voltage	
LC-PSA40/12V	0-40W	12VDC		LC-PSA40/24V	0-40W	24VDC	



Input	Power Factor(λ)	Ta (°C)	Tc (°C)	Dimmension (L*W*H)	Application Temperature	Waterproof Index	Approval
220-240V~, 50/60Hz, 330mA	>0.6	45	75	L132*W58*H31mm	-20~45°C	IP20	CE LVD CE EMC SEMKO
Model	Load	Output Voltage		Model	Load	Output Voltage	
LC-PSA60/12V	0-60W	12VDC		LC-PSA60/24V	0-60W	24VDC	

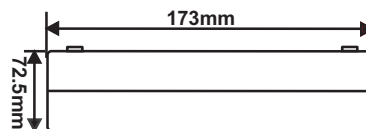

Input	Power Factor(λ)	Ta (°C)	Tc (°C)	Dimmension (L*W*H)	Application Temperature	Waterproof Index	Approval
220-240V~, 50/60Hz, 500mA	>0.6	45	75	L173*W72.5*H33mm	-20~45°C	IP20	CE LVD CE EMC
Model	Load	Output Voltage		Model	Load	Output Voltage	
LC-PSA90/12V	0-90W	12VDC		LC-PSA90/24V	0-90W	24VDC	