


Surface-Mounted Square Downlight Series






Model	KL-SM/S120-6W
Input Voltage	220-240V~(50/60Hz)
Power	6W
Light Source	SMD2835
Color Rendering Index	>80
Color Temperature	3000-6500K
Lumen	420-450lm
Beam Angle	180°
Application Temperature	-20~45°C
Dimmension	L120*W120*H35mm
Material	PC+Aluminum

Light Distribution Curve 6000K

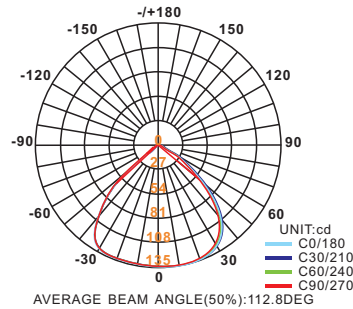


Average E(LX) Figure 6000K

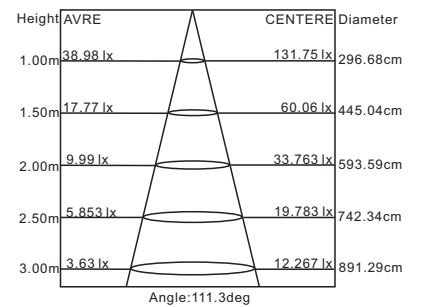




Model	KL-SM/S170-12W
Input Voltage	220-240V~(50/60Hz)
Power	12W
Light Source	SMD2835
Color Rendering Index	>80
Color Temperature	3000-6500K
Lumen	840-900lm
Beam Angle	180°
Application Temperature	-20~45°C
Dimmension	L170*W170*H35mm
Material	PC+Aluminum



Light Distribution Curve 6000K

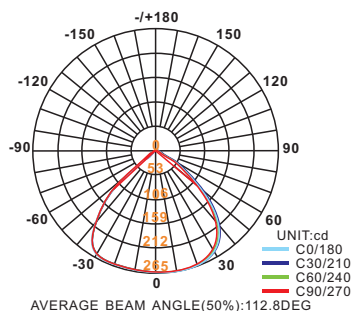

Average E(LX) Figure 6000K

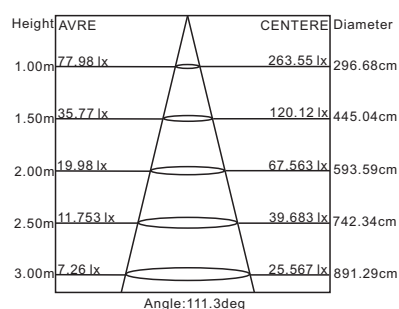


Surface-Mounted Square Downlight Series






Model	KL-SM/S225-18W
Input Voltage	220-240V~(50/60Hz)
Power	18W
Light Source	SMD2835
Color Rendering Index	>80
Color Temperature	3000-6500K
Lumen	1260-1350lm
Beam Angle	180°
Application Temperature	-20~45°C
Dimmension	L225*W225*H35mm
Material	PC+Aluminum

Light Distribution Curve 6000K

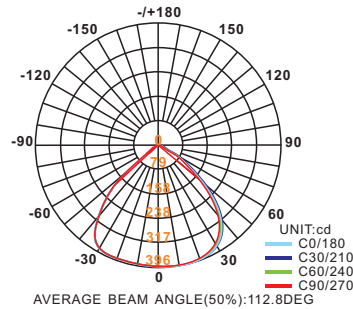


Average E(LX) Figure 6000K

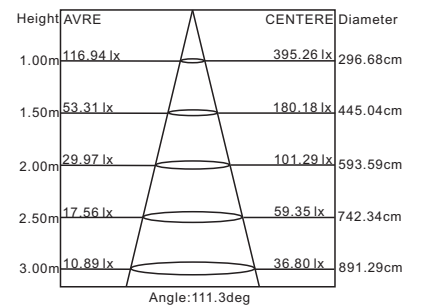




Model	KL-SM/S300-24W
Input Voltage	220-240V~(50/60Hz)
Power	24W
Light Source	SMD2835
Color Rendering Index	>80
Color Temperature	3000-6500K
Lumen	1680-1800lm
Beam Angle	180°
Application Temperature	-20~45°C
Dimmension	L300*W300*H35mm
Material	PC+Aluminum



Light Distribution Curve 6000K

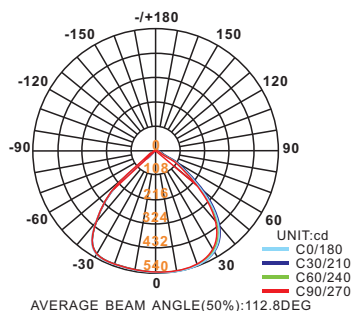

Average E(LX) Figure 6000K

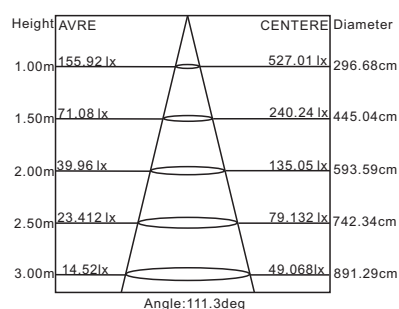


Surface-Mounted Square Downlight Series






Model	KL-SM/S400-28W
Input Voltage	220-240V~(50/60Hz)
Power	28W
Light Source	SMD2835
Color Rendering Index	>80
Color Temperature	3000-6500K
Lumen	1960-2100lm
Beam Angle	180°
Application Temperature	-20~45°C
Dimmension	L400*W400*H35mm
Material	PC+Aluminum

Light Distribution Curve 6000K

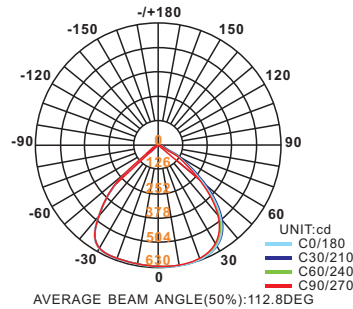


Average E(LX) Figure 6000K

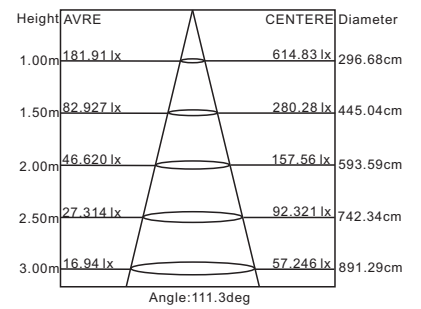




Model	KL-SM/S480-36W
Input Voltage	220-240V~(50/60Hz)
Power	36W
Light Source	SMD2835
Color Rendering Index	>80
Color Temperature	3000-6500K
Lumen	2520-2700lm
Beam Angle	180°
Application Temperature	-20~45°C
Dimmension	L480*W480*H35mm
Material	PC+Aluminum



Light Distribution Curve 6000K

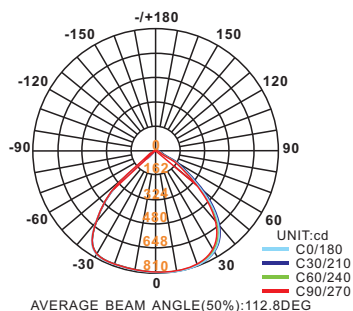



Average E(LX) Figure 6000K

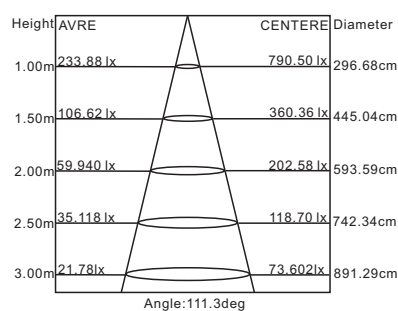


Surface-Mounted Square Downlight Series




Model	KL-SM/S480-40W
Input Voltage	220-240V~(50/60Hz)
Power	40W
Light Source	SMD2835
Color Rendering Index	>80
Color Temperature	3000-6500K
Lumen	2800-3000lm
Beam Angle	180°
Application Temperature	-20~45°C
Dimmension	L480*W480*H35mm
Material	PC+Aluminum



Light Distribution Curve 6000K

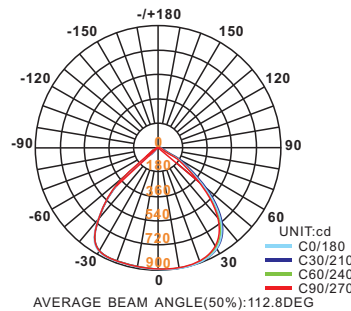


Average E(LX) Figure 6000K

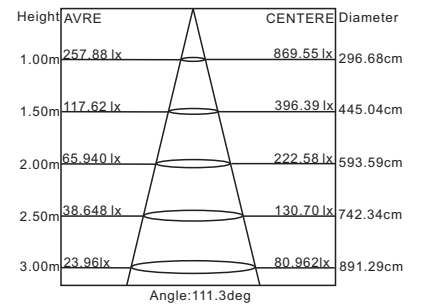




Model	KL-SM/S550-48W
Input Voltage	220-240V~(50/60Hz)
Power	48W
Light Source	SMD2835
Color Rendering Index	>80
Color Temperature	3000-6500K
Lumen	3360-3600lm
Beam Angle	180°
Application Temperature	-20~45°C
Dimmension	L550*W550*H35mm
Material	PC+Aluminum



Light Distribution Curve 6000K

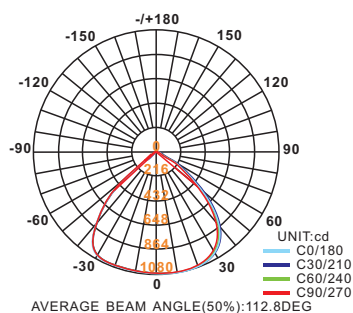


Average E(LX) Figure 6000K

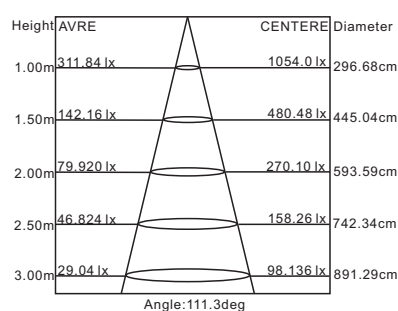

Surface-Mounted Square Downlight Series

Installation and Operation Instruction:

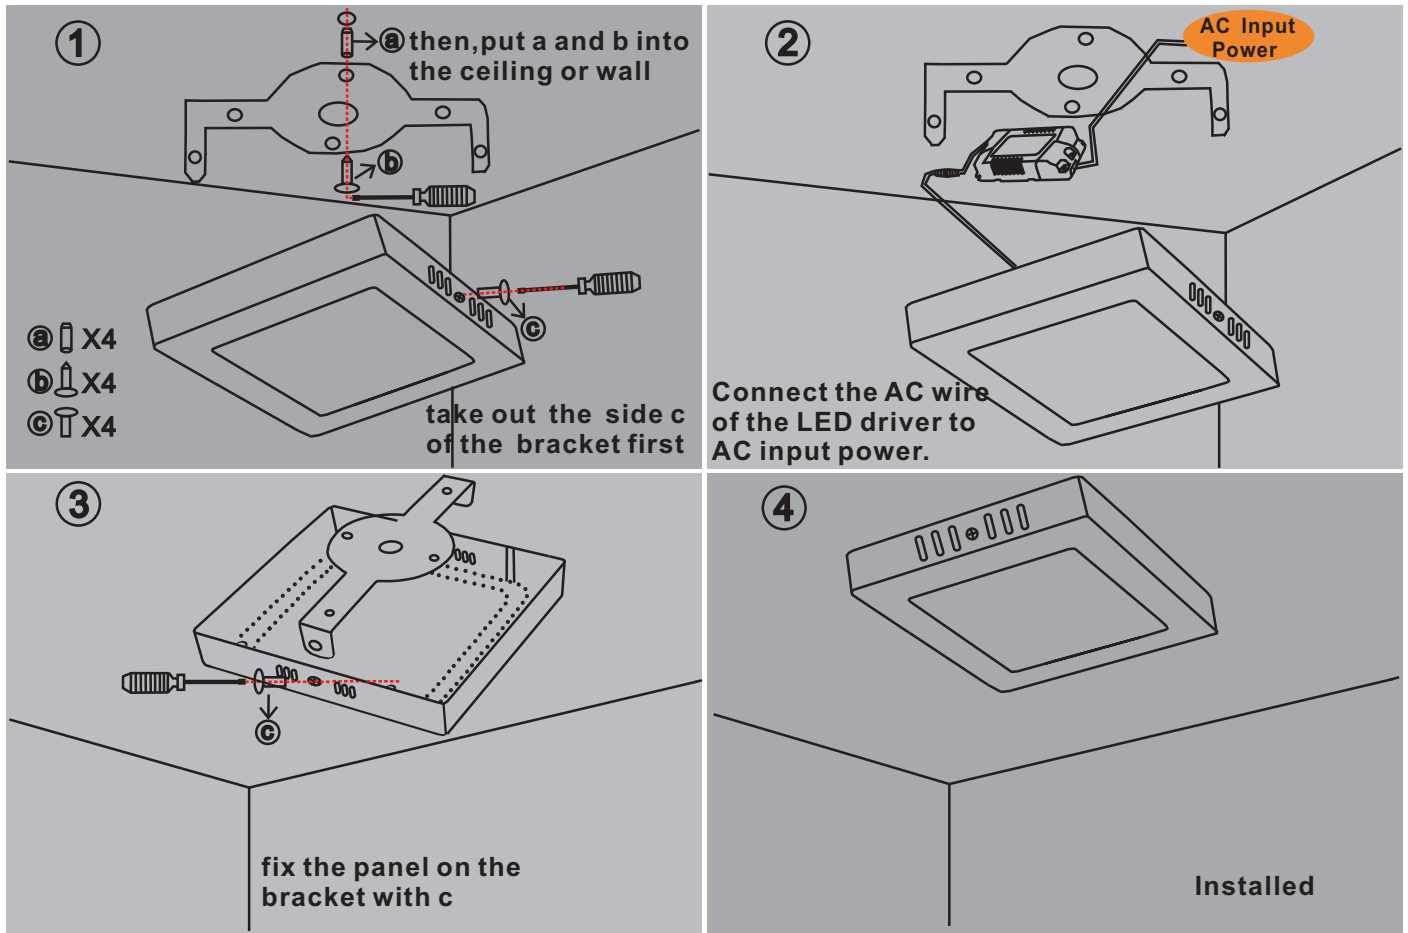

The Wiring Diagram:

