

●
**LED
PANEL
DOWN
LIGHT
Series**



- Ultra-Thin Round Downlight Series
- Ultra-Thin Square Downlight Series
- Surface-Mounted Round Downlight Series
- Surface-Mounted Square Downlight Series

Designed for HOME & COMMERCIAL use.



RoHS







Ultra-Thin Round Downlight Series




Model	KL-D85-3W
Input Voltage	220-240V~(50/60Hz)
Power	3W
Light Source	SMD2835
Color Rendering Index	>80
Color Temperature	3000-6500K
Lumen	210-225lm
Beam Angle	180°
Application Temperature	-20~45°C
Dimension	Φ85mm*H13mm
Cut Hole Size	Φ,70mm
Material	PC+Aluminum

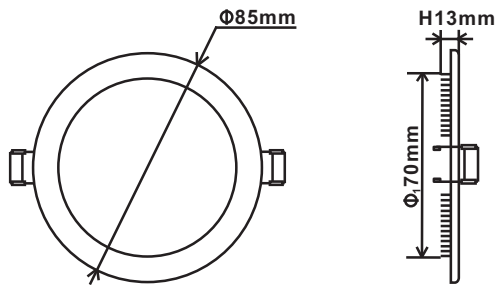

Light Distribution Curve 6000K

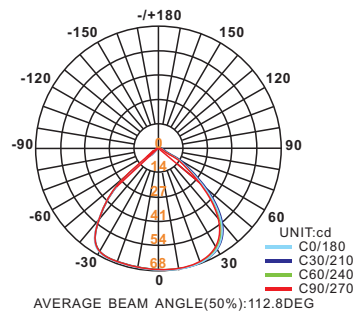


Average E(LX) Figure 6000K

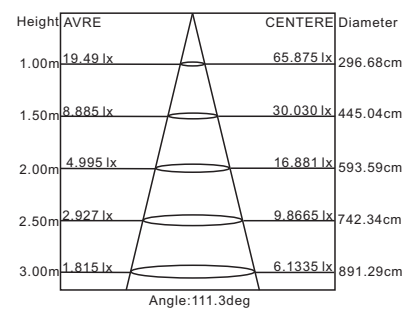



Model	KL-D120-6W
Input Voltage	220-240V~(50/60Hz)
Power	6W
Light Source	SMD2835
Color Rendering Index	>80
Color Temperature	3000-6500K
Lumen	420-450lm
Beam Angle	180°
Application Temperature	-20~45°C
Dimension	Φ120mm*H13mm
Cut Hole Size	Φ,105mm
Material	PC+Aluminum



Light Distribution Curve 6000K

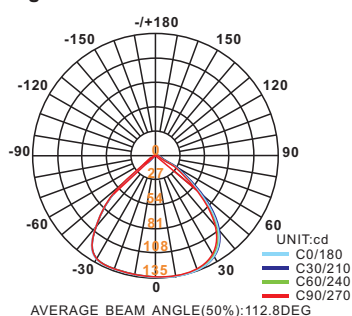


Average E(LX) Figure 6000K

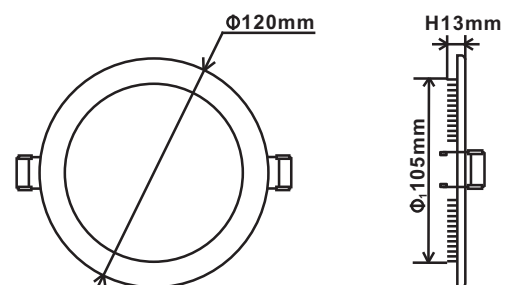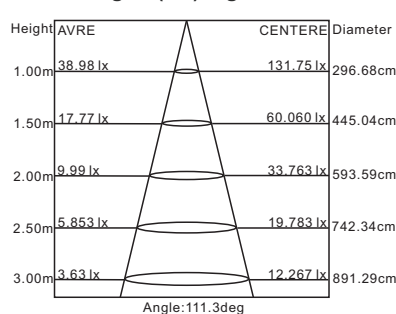


Ultra-Thin Round Downlight Series




Model	KL-D145-9W
Input Voltage	220-240V~(50/60Hz)
Power	9W
Light Source	SMD2835
Color Rendering Index	>80
Color Temperature	3000-6500K
Lumen	630-675lm
Beam Angle	180°
Application Temperature	-20~45°C
Dimension	Φ145mm*H13mm
Cut Hole Size	Φ ₁ 130mm
Material	PC+Aluminum

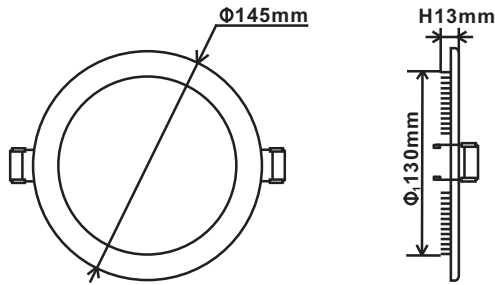

Light Distribution Curve 6000K

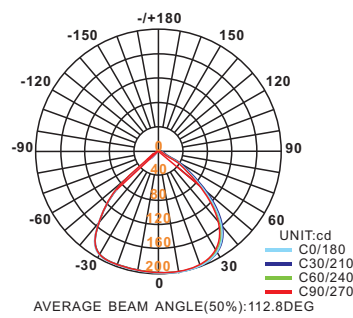


Average E(LX) Figure 6000K

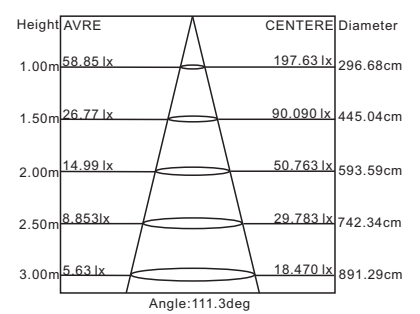



Model	KL-D170-12W
Input Voltage	220-240V~(50/60Hz)
Power	12W
Light Source	SMD2835
Color Rendering Index	>80
Color Temperature	3000-6500K
Lumen	840-900lm
Beam Angle	180°
Application Temperature	-20~45°C
Dimension	Φ170mm*H13mm
Cut Hole Size	Φ ₁ 155mm
Material	PC+Aluminum



Light Distribution Curve 6000K

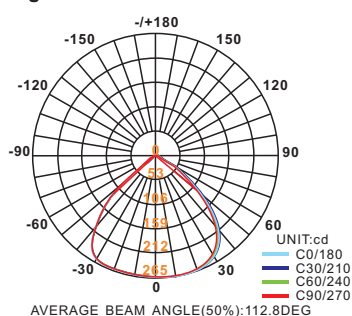


Average E(LX) Figure 6000K

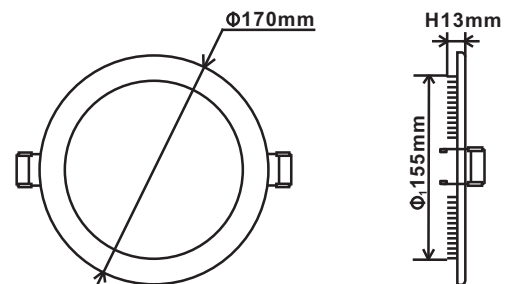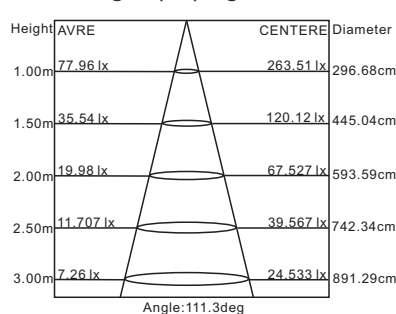


Ultra-Thin Round Downlight Series




Model	KL-D190-14W
Input Voltage	220-240V~(50/60Hz)
Power	14W
Light Source	SMD2835
Color Rendering Index	>80
Color Temperature	3000-6500K
Lumen	980-1050lm
Beam Angle	180°
Application Temperature	-20~45°C
Dimension	Φ190mm*H13mm
Cut Hole Size	Φ ₁ 175mm
Material	PC+Aluminum

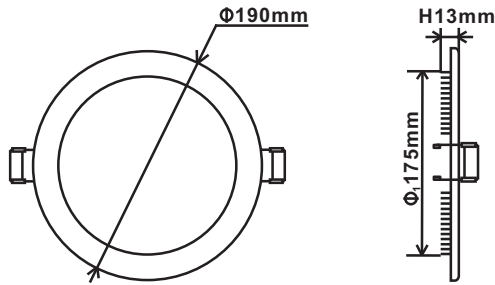

Light Distribution Curve 6000K

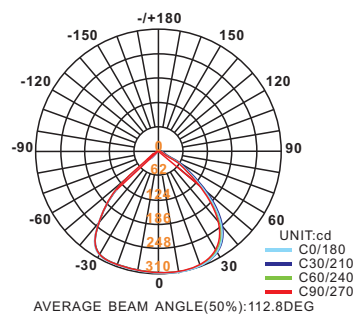


Average E(LX) Figure 6000K

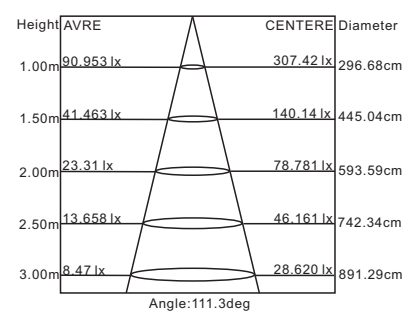



Model	KL-D225-18W
Input Voltage	220-240V~(50/60Hz)
Power	18W
Light Source	SMD2835
Color Rendering Index	>80
Color Temperature	3000-6500K
Lumen	1260-1350lm
Beam Angle	180°
Application Temperature	-20~45°C
Dimension	Φ225mm*H13mm
Cut Hole Size	Φ ₁ 210mm
Material	PC+Aluminum



Light Distribution Curve 6000K

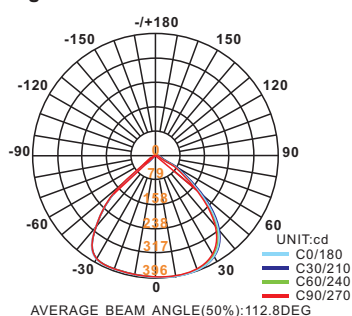



Average E(LX) Figure 6000K

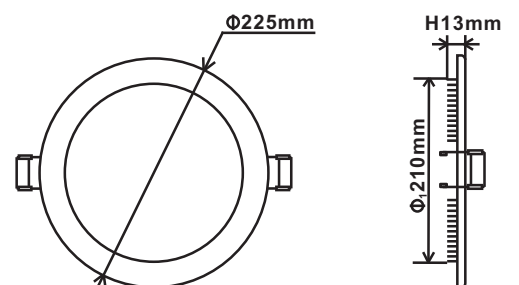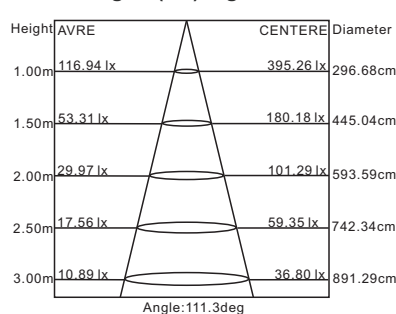


Ultra-Thin Round Downlight Series




Model	KL-D240-20W
Input Voltage	220-240V~(50/60Hz)
Power	20W
Light Source	SMD2835
Color Rendering Index	>80
Color Temperature	3000-6500K
Lumen	1400-1500lm
Beam Angle	180°
Application Temperature	-20~45°C
Dimension	Φ 240mm*H13mm
Cut Hole Size	Φ ₁ 225mm
Material	PC+Aluminum



Light Distribution Curve 6000K

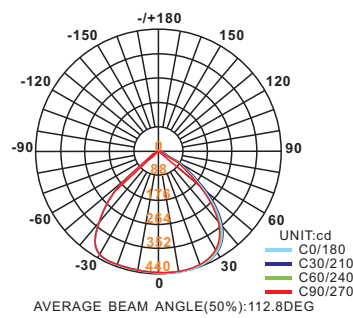


Average E(LX) Figure 6000K

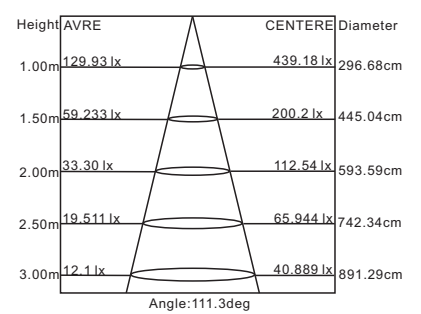




Model	KL-D300-25W
Input Voltage	220-240V~(50/60Hz)
Power	25W
Light Source	SMD2835
Color Rendering Index	>80
Color Temperature	3000-6500K
Lumen	1750-1875lm
Beam Angle	180°
Application Temperature	-20~45°C
Dimension	Φ300mm*H13mm
Cut Hole Size	Φ ₁ 285mm
Material	PC+Aluminum




Light Distribution Curve 6000K

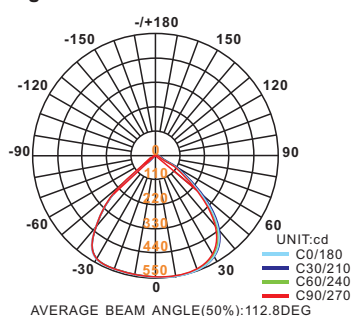

Average E(LX) Figure 6000K

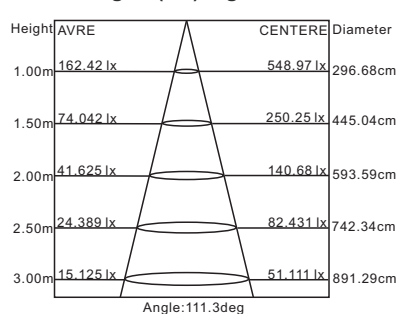

Installation and Operation Instruction:

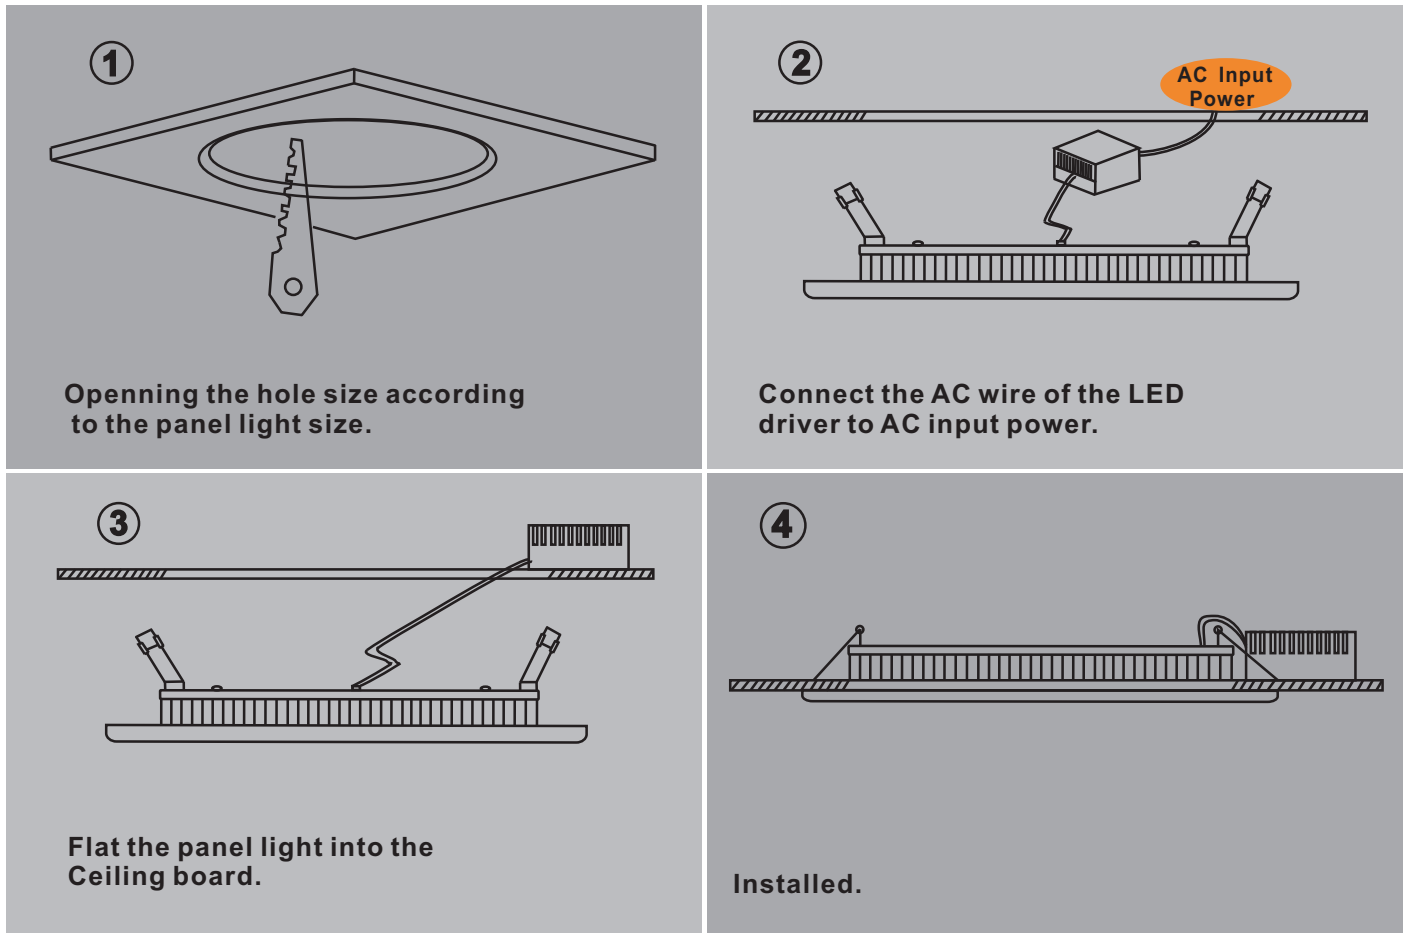

The Wiring Diagram:

