




LED CEILING LIGHT Series

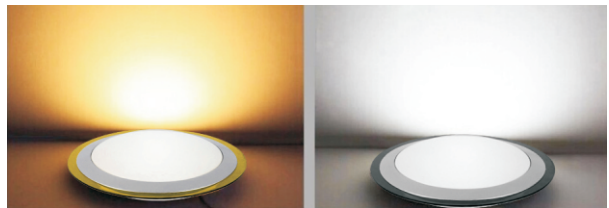

- UFO Series
- Modern Series
- Fancy Series
- Hang Series



Designed for HOME & COMMERCIAL use.



RoHS






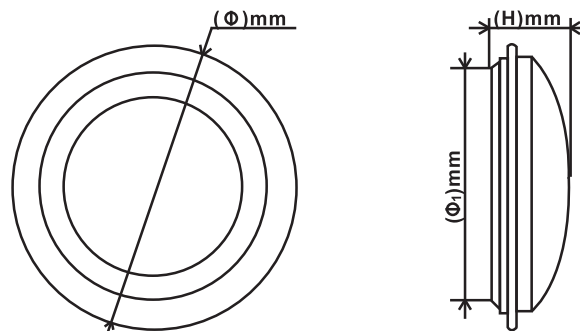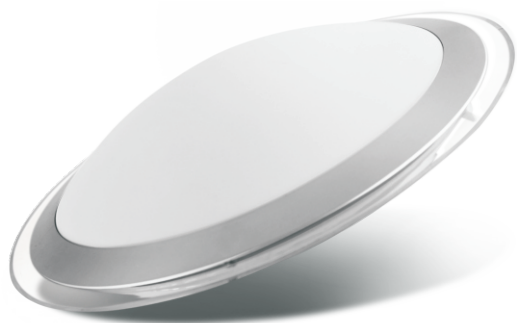


Input Voltage	Light Source	Color Rendering Index	Color Temperature	Beam Angle	Application Temperature	Material	Cover Type
220-240V~ (50/60Hz)	SMD5730	>80	3000 6500K	180°	-20~45℃	PC Aluminum	PMMA acrylic

Model	KL-RCL/15250
Power	10W
Lumen	750-800lm
Dimmension	Φ335mm*H105mm
Installing Calibre	Φ _i 250mm
Function1	Normal
Function2	TRIAC Dimmer
Function3	Remote Dimmer

Light Distribution Curve 6000K

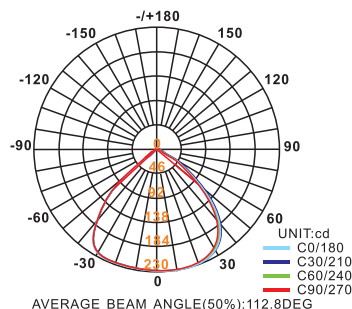


Average E(LX) Figure 6000K

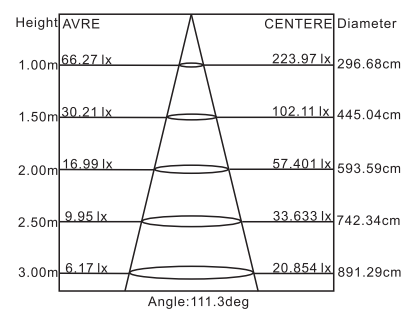


Model	KL-RCL/15350
Power	18W
Lumen	1350-1440lm
Dimmension	Φ445mm*H110mm
Installing Calibre	Φ _i 350mm
Function1	Normal
Function2	TRIAC Dimmer
Function3	Remote Dimmer

Light Distribution Curve 6000K

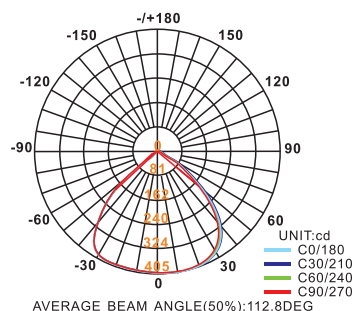


Average E(LX) Figure 6000K

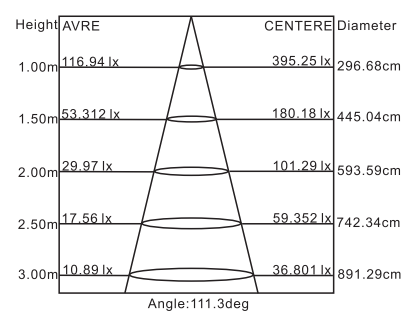


Model	KL-RCL/15450
Power	30W
Lumen	2250-2400lm
Dimmension	Φ540mm*H115mm
Installing Calibre	Φ _i 450mm
Function1	Normal
Function2	TRIAC Dimmer
Function3	Remote Dimmer


Light Distribution Curve 6000K

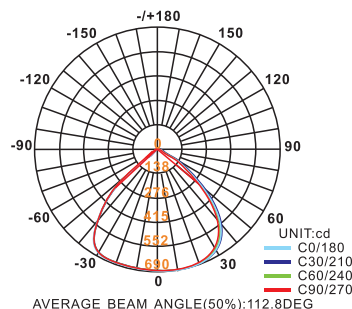


Average E(LX) Figure 6000K

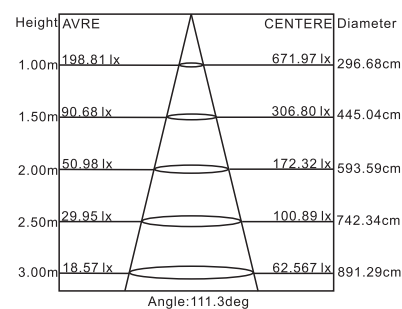


Installation and Operation Instruction:

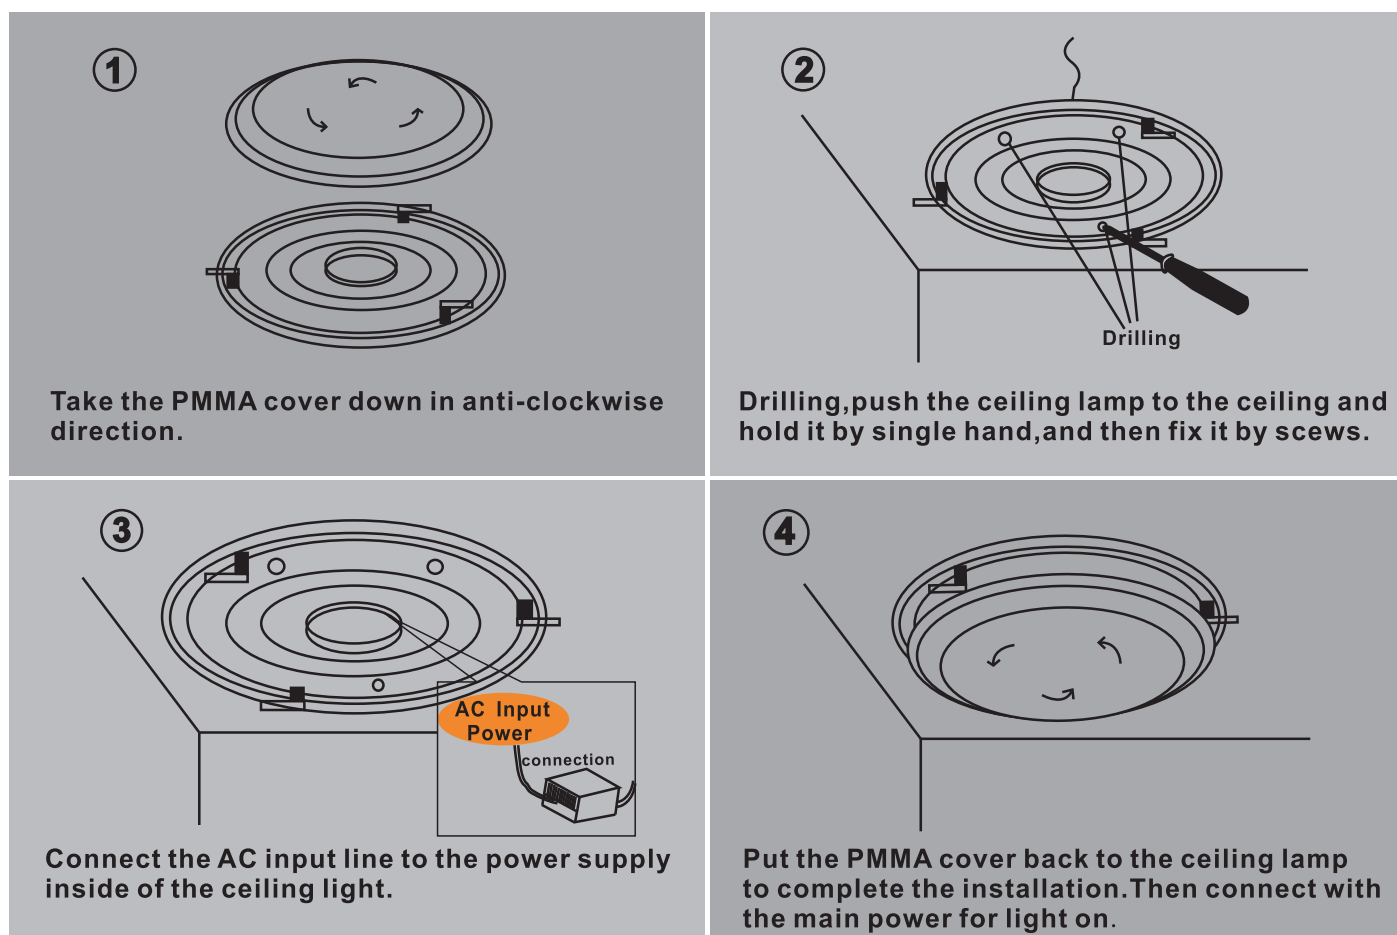

The Wiring Diagram:

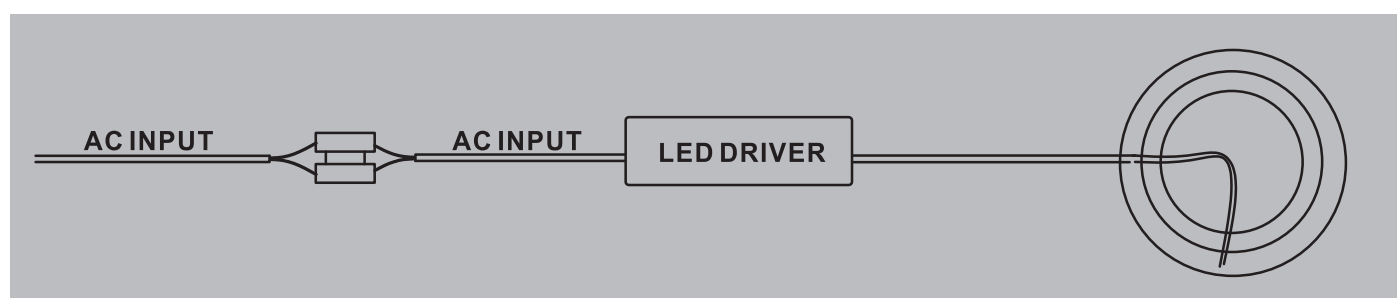


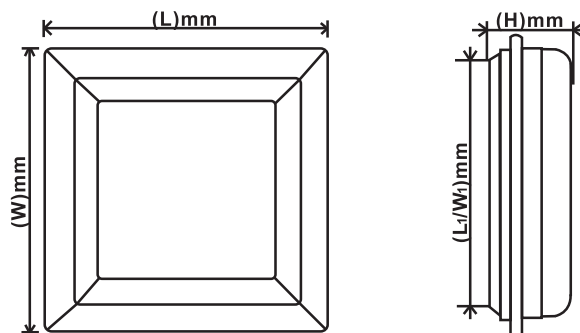


Input Voltage	Light Source	Color Rendering Index	Color Temperature	Beam Angle	Application Temperature	Material	Cover Type
220-240V~ (50/60Hz)	SMD5730	>80	3000 6500K	180°	-20~45℃	PC Aluminum	PMMA acrylic

Model	KL-RCL/16250
Power	12W
Lumen	900-960lm
Dimmension	L335*W335*H110mm
Installing Calibre	L250*W250mm
Function1	Normal
Function2	TRIAC Dimmer
Function3	Remote Dimmer

Light Distribution Curve 6000K

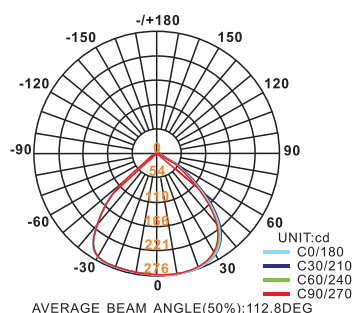


Average E(LX) Figure 6000K

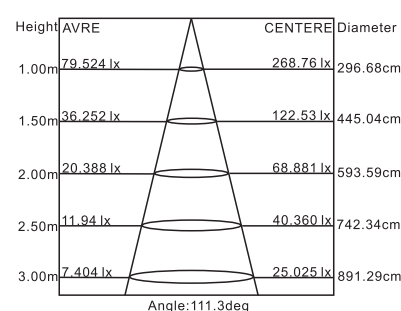


Model	KL-RCL/16350
Power	20W
Lumen	1500-1600lm
Dimmension	L435*W435*H110mm
Installing Calibre	L350*W350mm
Function1	Normal
Function2	TRIAC Dimmer
Function3	Remote Dimmer

Light Distribution Curve 6000K

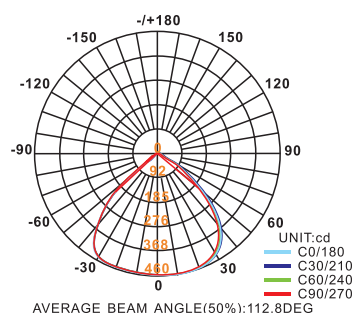


Average E(LX) Figure 6000K

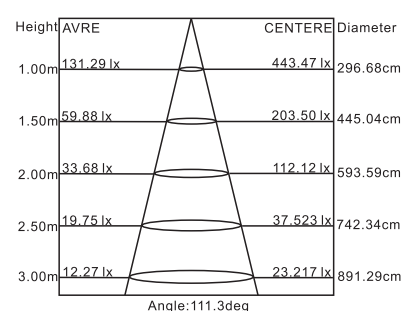


Model	KL-RCL/16430
Power	30W
Lumen	2250-2400lm
Dimmension	L545*W545*H115mm
Installing Calibre	L430*W430mm
Function1	Normal
Function2	TRIAC Dimmer
Function3	Remote Dimmer


Light Distribution Curve 6000K

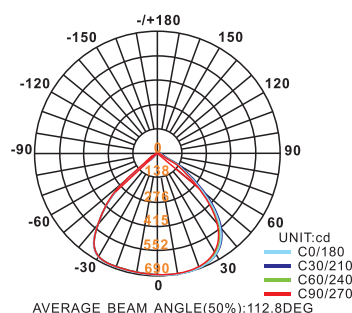


Average E(LX) Figure 6000K


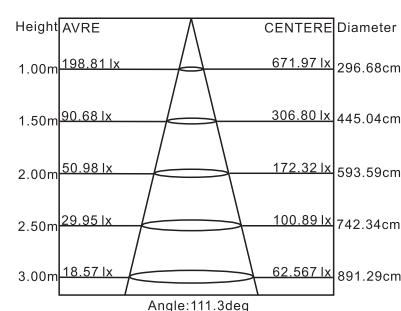


Installation and Operation Instruction:

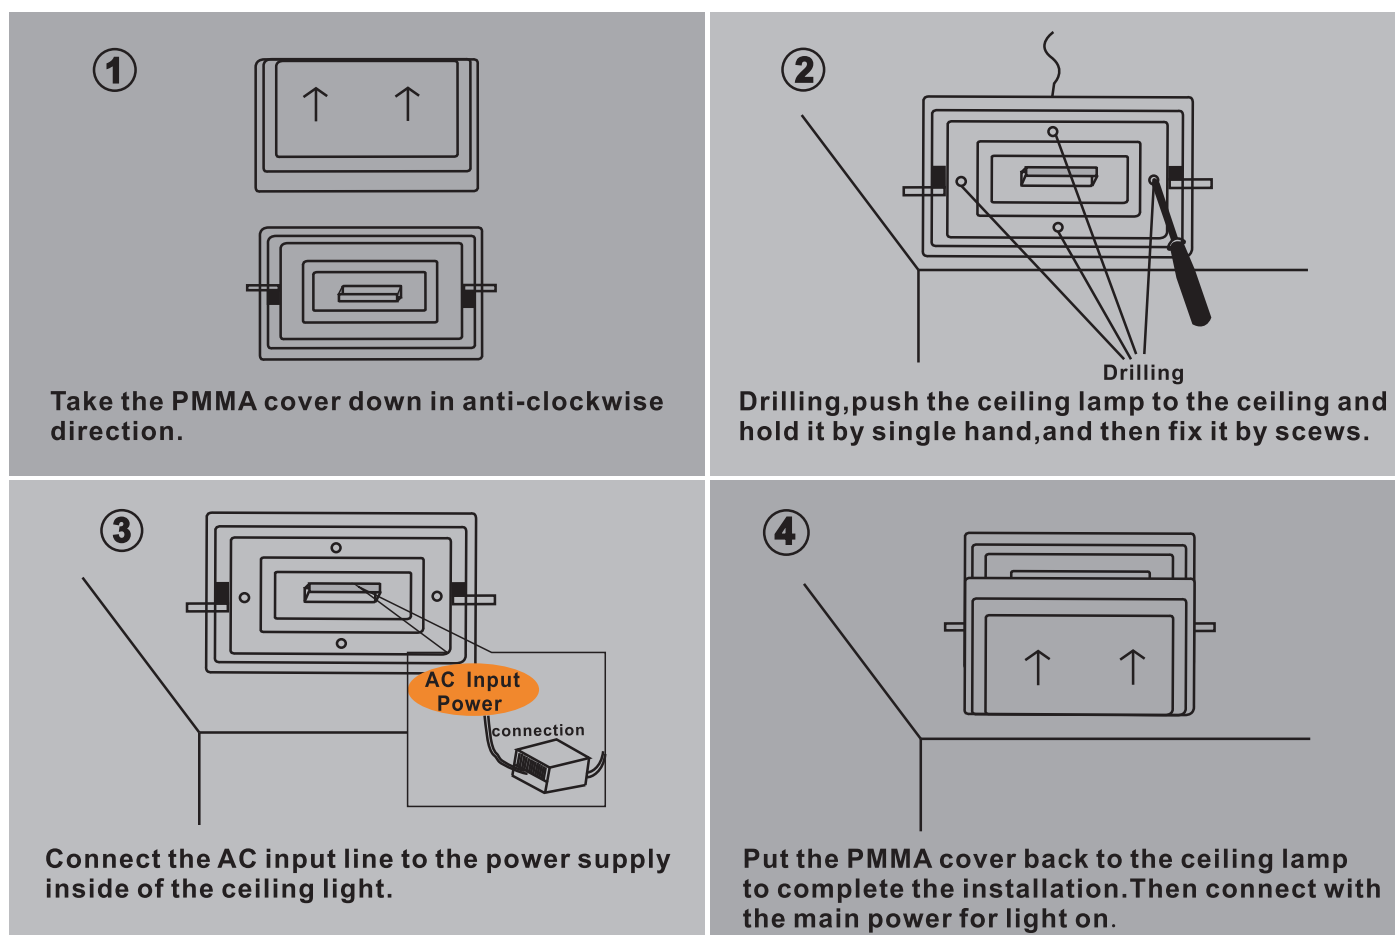

The Wiring Diagram:

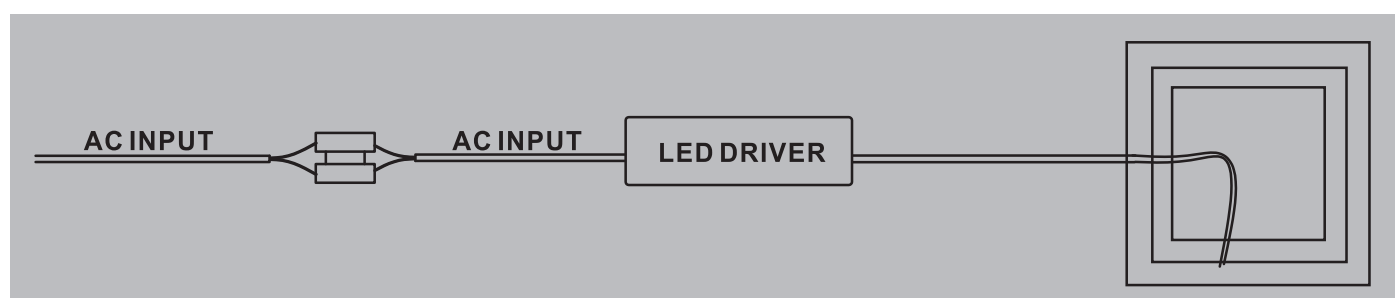


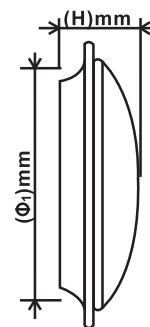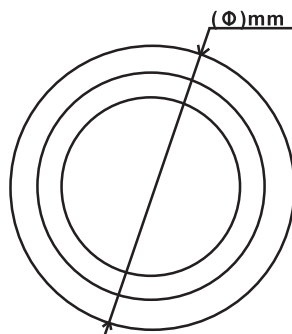


Input Voltage	Light Source	Color Rendering Index	Color Temperature	Beam Angle	Application Temperature	Material	Cover Type
220-240V~ (50/60Hz)	SMD5730	>80	3000 6500K	180°	-20~45℃	PC Aluminum	PMMA acrylic

Model	KL-RCL/17200
Power	16W
Lumen	1200-1280lm
Dimmension	Φ400mm*H90mm
Installing Calibre	Φ ₁ 200mm
Function1	Normal
Function2	TRIAC Dimmer
Function3	Remote Dimmer

Light Distribution Curve 6000K

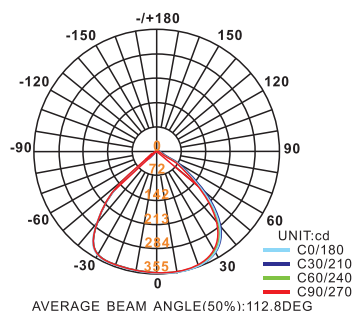


Average E(LX) Figure 6000K

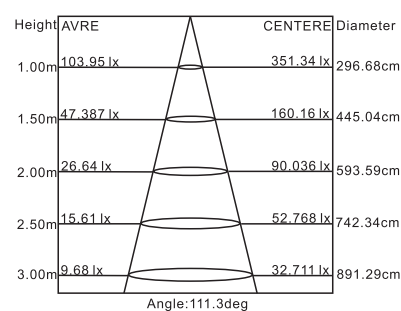


Model	KL-RCL/17300
Power	24W
Lumen	1800-1920lm
Dimmension	Φ500mm*H90mm
Installing Calibre	Φ ₁ 300mm
Function1	Normal
Function2	TRIAC Dimmer
Function3	Remote Dimmer

Light Distribution Curve 6000K

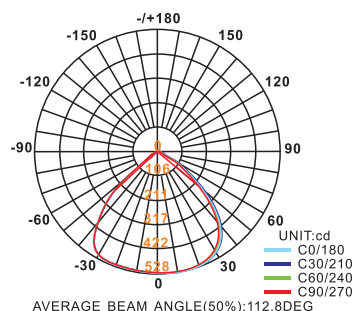


Average E(LX) Figure 6000K

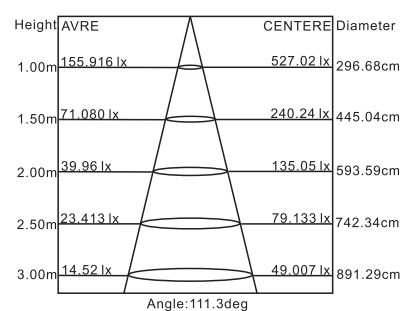


Model	KL-RCL/17400
Power	34W
Lumen	2550-2720lm
Dimmension	Φ600mm*H90mm
Installing Calibre	Φ ₁ 400mm
Function1	Normal
Function2	TRIAC Dimmer
Function3	Remote Dimmer


Light Distribution Curve 6000K

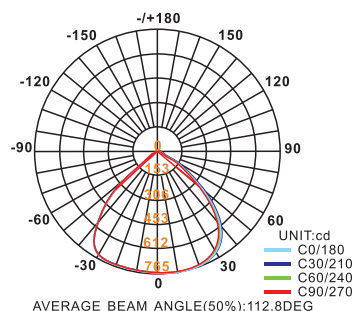

Average E(LX) Figure 6000K

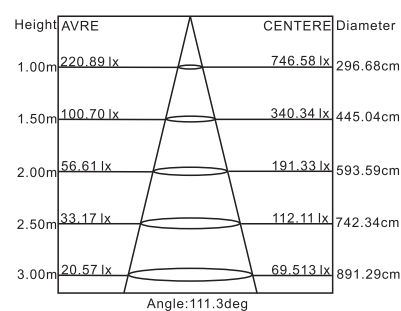

Installation and Operation Instruction:

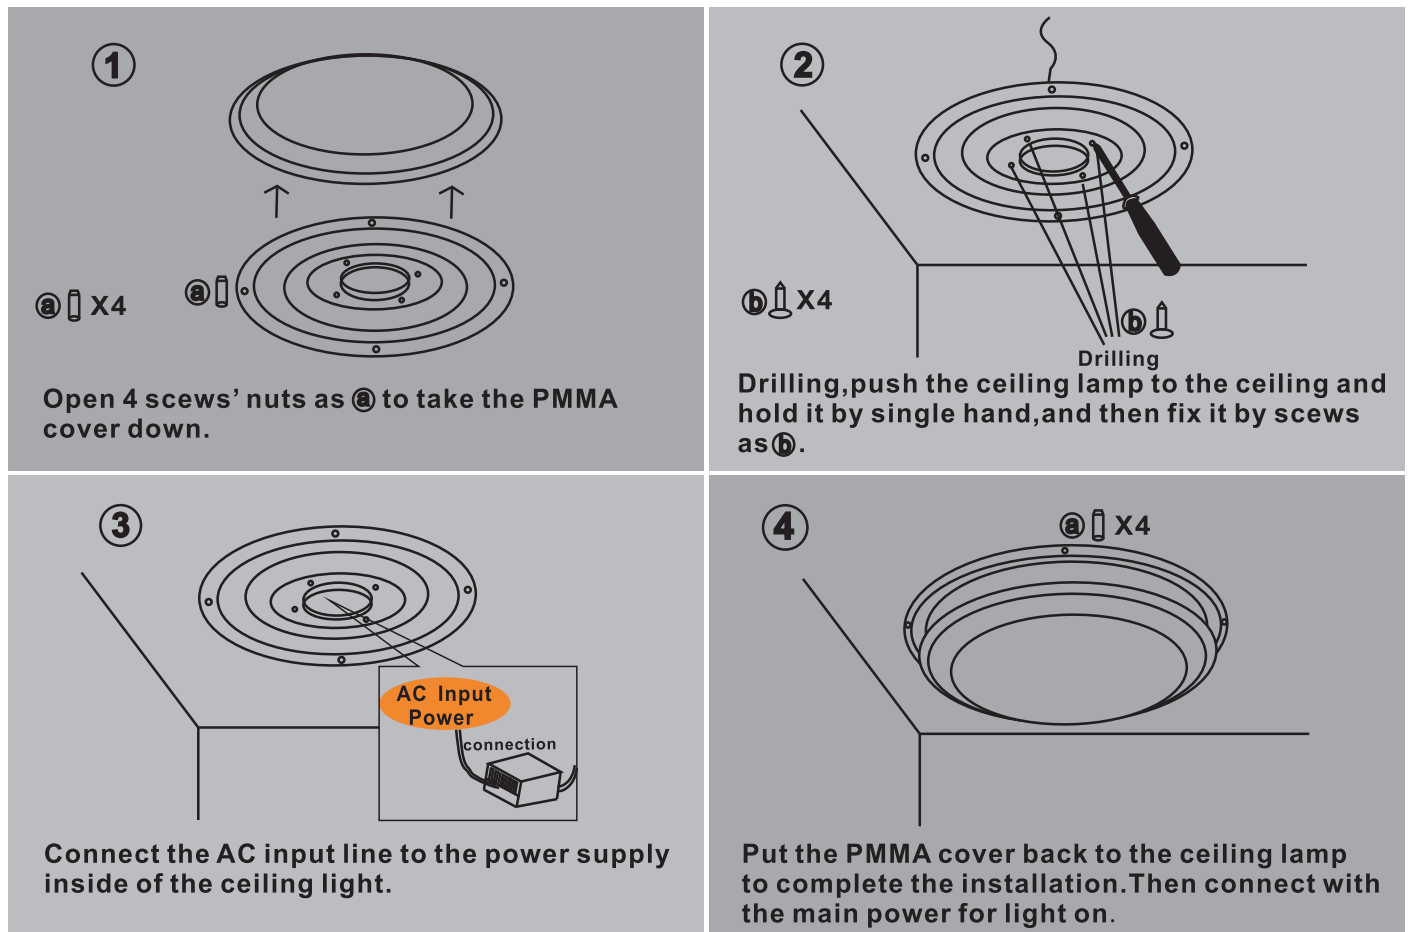

The Wiring Diagram:

